

## Features




- ▶ Embedded compact chassis
- ▶ Fanless solution
- ▶ Processor Intel® Core™ i5-5350U
- ▶ Customise your I/O
- ▶ Dual Gigabit Ethernet
- ▶ Expansion slots: 1 x half mPCIe + 1 x full mSATA/mPCIe
- ▶ WIFI a/b/g/n/ac (option)
- ▶ HDD/SSD access - easy maintenance
- ▶ Wall mount bracket & VESA 100
- ▶ Internal power supply



- Intel Core i5
- Windows
- Fanless
- Résistant
- Wifi
- Bluetooth
- RoHS
- CE



## I/O ports

- |                |                     |
|----------------|---------------------|
| 1 - USB 2.0    | 11 - COM 1          |
| 2 - Reset      | 12 - COM 2          |
| 3 - Voyant HDD | 13 - Audio line out |
| 4 - On/Off     |                     |
| 5 - Power      |                     |
| 6 - DVI-I      |                     |
| 7 - ETH 2      |                     |
| 8 - ETH 1      |                     |
| 9 - USB 3.0    |                     |
| 10 - USB 3.0   |                     |

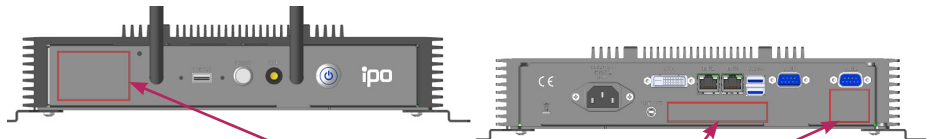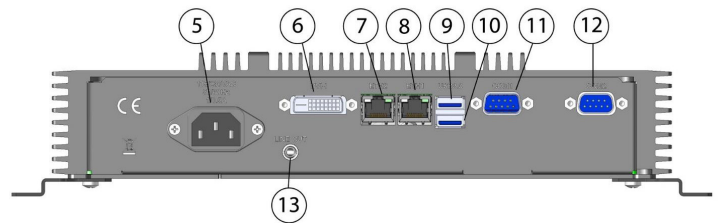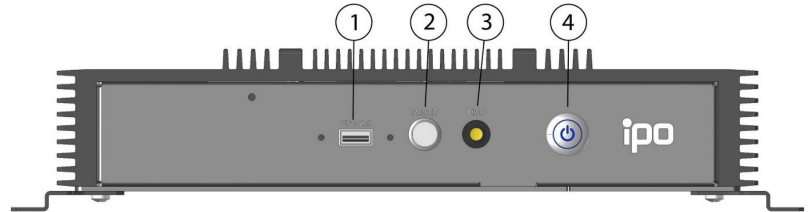

Customize your I/O

## Mechanicals drawing

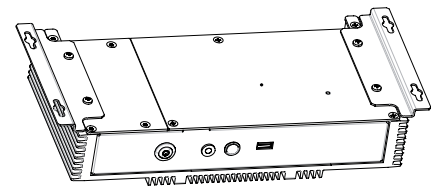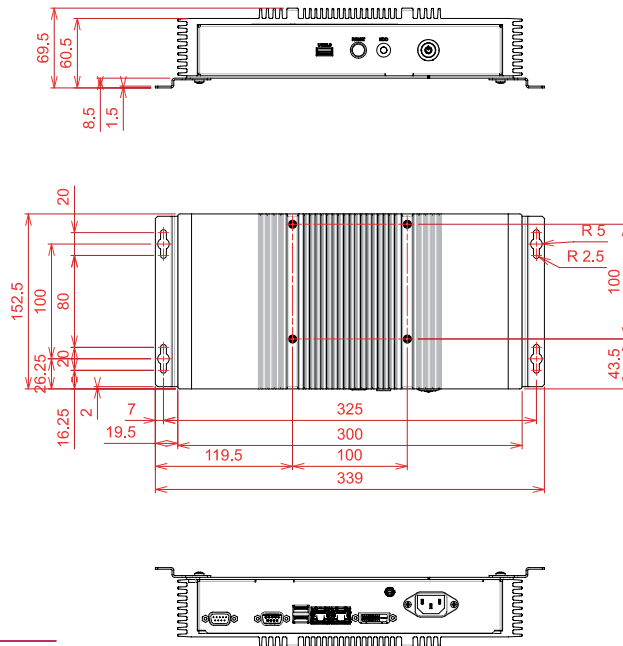

# Specifications

<b>Chassis</b>	Construction	Chassis in anodised extruded aluminum Rear in treated aluminum - thickness 2mm
	Mouting	Wall mount bracket Vesa 100
	Color	Black paint RAL9005
<b>CPU</b>	Processor	Intel® Core™ i5-5350U - 1.8GHz
	Chipset	Intel® 5th Generation Core™ i U-series
	RAM	2 x DDR3L SO-DIMM (max. 16.0 Go)
	Expansion	1x half size mPCIe + 1x full size mSATA/mPCIe
<b>Storage</b>	HDD / SSD	1x 2"1/2 SATA
	mSATA	1x slot
<b>System I/O</b>	Front	1 x USB 2.0 Additional I/O to customize in different area
	Rear	2 x COM - 2 x USB 3.0 - 2 x Gigabit Ethernet - 1 x DVI-I - 1 x audio Additional I/O to customize in different area
<b>Button &amp; Indicator</b>	Front	Backlit On/Off button Reset button HDD Led
	<b>System Cooling</b>	Fanless
	<b>Dimensions</b>	Dimensions (WxHxD)
Weight		3Kg
<b>Power supply</b>	AC~ version	115/230VAC 1/0,5A 50/60Hz Power consumption: 40W
	DC= version	12-24VDC
<b>Safety &amp; EMC</b>	Security	EN60950-1
	EMC	EN55022,EN61000-3-2,EN61000-3-3,EN55024,EN-61000-4-2,EN-61000-4-3, EN-61000-4-4, EN-61000-4-5, EN-61000-4-6, EN-61000-4-8, EN-61000-4-11
<b>Safety &amp; EMC</b>	Operating Temperature	0° ~ + 60°C
	Storage Temperature	- 20 .... + 50°C
	Relative Humidity	5 ..... 95 %
<b>Warranty</b>	2 years Parts & Labour return to base as standard	
<b>Options</b>	12/24VDC	12/24VDC power supply Rail DIN mounting solution
	OPT/WIFI+BTH/FUT	mPCIe WIFI a/b/g/n/ac card with two antennas
	OPT/RS485 or OPT/RS485/I	1x RS485 on COM2 - RS485 on COM3/COM4 withc OPT/RS232/MPCIE

## Expansion card combination

Part No.	Designation	Format	C/RAD/ MPCIE/7260/IN	C/USB3.0/MPCIE	SSD64G/MSATA/ MSA370	C/RS232/MPCIE/ EXAR
C/RAD/ MPCIE/7260/IN	Wifi card	half size		Yes	Yes	Yes
C/USB3.0/MPCIE	2 x USB 3.0 card	full size	Yes		No	No

## Ordering Information

**IPROXCI/\*** Fanless compact PC - Intel® Core™ i5-5350U - 1 x SSD  
2"1/2 - 1 x mSATA - Power supply

\* Choose your power supply: AC / DC

Please ask for additional information about **Options & Accessories**.

## Packing list

1 Power cord CE22 1.80 m (Version AC-)

1 Utility CD includes: User's manual

2 Wall mount bracket

1 Software Liscence (label format)

1 Production&Traceability datasheet